



ULTRAFILTER
THE FILTRATION MANUFACTURER

Kronsbein ultrafilter®



**Process filter P-GS
sterile filter of sintered steel for
gases, liquids and steam**

P-GS sterile filter

Ultrafilter P-GS

The ultrafilter P-GS filter is designed for removal of particles from gases, liquids and steam.

The P-GS consists of a regenerable weld-less filter pipe made from sintered stainless steel. The retention rate extend from 1 µm to 25 µm.

Features and advantages

- Good durability against most liquids, aggressive gases and steam.
- The porosity level is more than 50 % ensuring high particle and dirt load capacity as well as a good flow rate at a low differential pressure.
- Regeneration by ultrasonic bath.

Applications

- Breweries
- Chemical Industry
- Dairy industry
- Electronic industry
- Fermentation processes
- Food and beverages
- Pharmaceutical Industry
- Plastic industry
- Aseptic packing

Features	Benefits
Filter medium and end caps made of stainless steel	Good durability against most liquids, gases and aggressive steams
Retention rate of 1 µm, 5 µm and 25 µm (98% efficiency for steam and 100 % efficiency for gases)	Exactly defined particle retention rate at given pore size
Sintered stainless steel filter medium with a porosity level of more than 50 %	High dirt holding capacity, good flow rate at low differential pressure
Regenerable with ultrasonic bath	Filtration costs reduced to a minimum, in particluar for hight dirt load
Stainless steel sintering technology	No use of additives or other chemical binders needed
Available in 13 sizes	Optimum filter size for individual application
Components made of stainless steel	Temperature range from -20 °C up to 210 °C

Materials	
Filter media	Sintered SS 1.4404
End caps	SS 1.4301
Bonding material	Plastic Steel*
O-Rings	EPM**
* > 150 °C welded endcaps ** Silicone, Buna N, Viton, Fluoraz on request	



Kronsbein ultrafilter®

P-GS sterile filter

Filtration surface:

494 cm² per 10" Element (10/30) (250 mm)

Absolute retention rate:

1 µm to 25 µm

Temperature range:

-20 °C bis 210 °C

Max. differential pressure:


5 bar

Conversion factor for steam temperature


Steam temperature	°C	110	121	140	160
	°F	212	250	285	320
Conversion factor		0,5	1	2	3

Dimensions


Element size	A mm	B mm	Ø C mm	Ø D mm	correction factor
03/10	76	12	3/4"	42	0,12
04/10	104	12	3/4"	42	0,17
04/20	104	14	1"	52	0,19
05/20	104	14	1"	52	0,19
05/25	128	14	1"	62	0,32
05/30	128	16	2"	86	0,46
07/25	180	14	1"	62	0,47
07/30	180	16	2"	86	0,68
10/30	254	16	2"	86	1,00
15/30	381	16	2"	86	1,55
20/30	508	16	2"	86	2,10
30/30	762	16	2"	86	3,28
30/50	762	16	3"	140	5,89

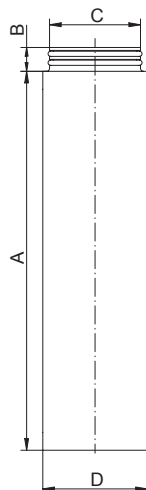

Flow rate of a 10" P-GS element – air (1bar, 20 °C)

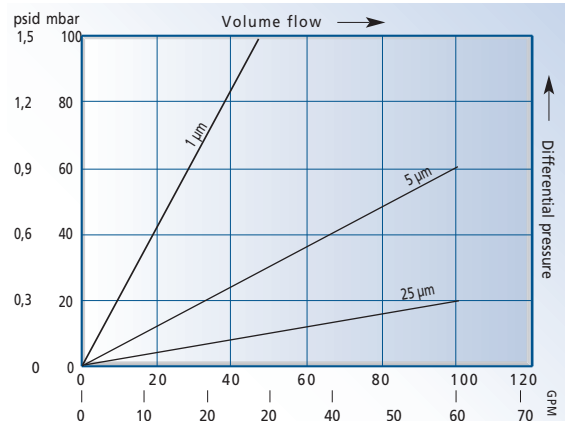

Flow rate of a 10" P-GS element – saturated steam 121 °C

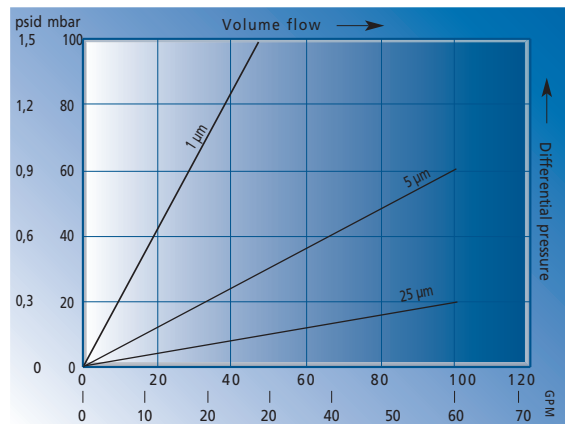

Technical Alternations reserved



ultrafilter gmbh

Otto-Hahn-Str. 1 • 40721 Hilden • Germany

Tel: +49 (0) 21 03.33 36 0 • Fax +49(0)21 03.33 36 36

e-Mail: info@ultra-filter.de • www.ultra-filter.de

**ultrafilter GmbH**

Otto-Hahn-Str. 1
40721 Hilden
Tel. +49 (0) 2103 33 36 0
Fax: +49 (0) 2103 33 36 36
eMail: info@ultra-filter.de
www.ultra-filter.de

**ultra.air AG**

Leutschenbachstrasse 45
8050 Zürich / Schweiz
Tel. +41 (0) 44 224 6060
Fax: +41 (0) 44 224 6061
eMail: info@ultraair.ch
www.ultraair.ch

**ultrafilter S.A. Mexico**


Tlalnepantla, Estado de México
Tel. +55 5362 8452
Fax: +55 5361-5444
eMail: contacto@solvik-int.com
www.solvik-int.com

**ultra.air GmbH**

Im Hülsenfeld 13
40721 Hilden
Tel. +49(0)2103 33 36 0
Fax: +49(0)2103 33 36 36
eMail: info@ultraair.de
www.ultraair.de

**ultra.air AG**

Leutschenbachstrasse 45
8050 Zürich / Schweiz
Tel. +41 (0) 44 224 6060
Fax: +41 (0) 44 224 6061
eMail: info@ultraair.ch
www.ultraair.ch

**ultrafilter USA Inc.**

Denver CO, USA
Tel. +1 (303) 321 3809
Fax +1 (720) 979 9640
eMail: info@ultrafilter.us
eMail: mike.lewis@ultra-filter.us
www.ultra-filter.us

**ultrafilter Ltd.
China**

Room 201, Xueyuan Road 16#
100083 Haidian Distric
Beijing • P.Republic of China
Tel. +86 10 8333 0822
Fax: +86 10 8115 9861
eMail: csfinox@yahoo.com.cn

**ultrafilter Ltd.
South Africa**

Artic Driers
12 Rotterdam Road
Apex Industrial
Benoni • South Africa
Tel. +27 (0)11 420 0274
eMail: allen@articdriers.co.za

**ultrafilter
Skandinavia ApS**

Sunekær 1
5471 Sønderød / Denmark
Tel. +45(0) 82 303 020
Email: info@ultra-filter.dk
www.ultra-filter.dk

**ultrafilter G. Britain Ltd.**

90 Church Road
Hereford
HR1 1RS
Tel. +44 (0) 1432 367 975
eMail: sales@ultrafilter.uk.com

**PT ultrafilter Indonesia**

Jakarta 10570 • Indonesia
Tel. +62-21 4280 0909
Fax: +62 21 4280 0505
eMail: info@ultrafilter.co.id
www.ultrafilter.co.id

**ultrafilter Oy Finland**

Mukulakuja 4 A 7
04300 Tuusula
Finland
www.ultra-filter.fi

Technical Alternations reserved



Kronsbein ultrafilter®

ultrafilter gmbh

Otto-Hahn-Str. 1 • 40721 Hilden • Germany
Tel: +49 (0) 21 03.33 36 0 • Fax +49(0)21 03.33 36 36
e-Mail: info@ultra-filter.de • www.ultra-filter.de